


Brytee® Monitor B001A User Manual – V1.1

January 2024

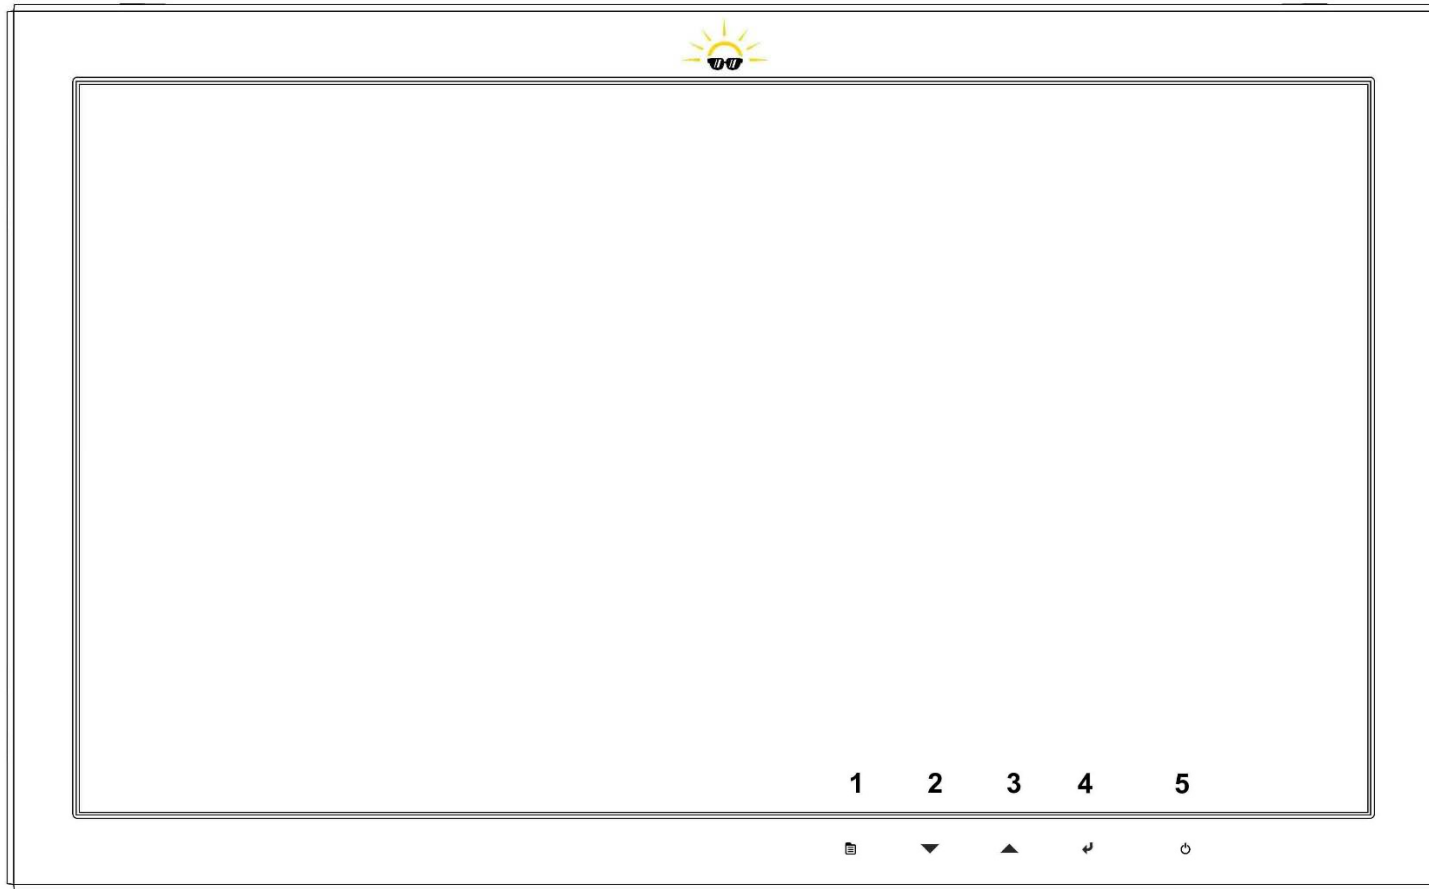

1	2	3	4	5
<u>Menu/Select</u>	<u>Down</u>	<u>Up</u>	<u>Return</u>	<u>POWER</u>
Opens Menu Tree	Moves Down Tree	Moves Up Tree	Returns Up/Out Menu Tree	Monitor Power ON/OFF
Selects Into Menu Tree	Decreases Values	Increases Values		LED on (R or G) if Power is ON
	Quick Adjust Volume	Quick Adjust Brightness		LED off if Power is OFF

Quick Adjust Brightness: Click the UP button. Brightness is factory set to 100. Hold “DOWN” or “UP” buttons to adjust brightness

Quick Adjust Volume: Click the DOWN button. Volume is factory set to 50. Hold “DOWN” or “UP” buttons to adjust volume

FACTORY SETTINGS

Function	Value	Notes
Brightness	100	Set for 2500+ Nits
Contrast	82	Set for 2500+ Nits
ECO	Standard	Not relevant for HB operation
DCR	OFF	Not relevant for HB operation
H. Position	Not Used	Not relevant for HDMI
V. Position	Not Used	Not relevant for HDMI
Clock	Not Used	Not relevant for HDMI
Phase	Not Used	Not relevant for HDMI
Aspect	Wide	Don't change. Will enable 4:3 aspect
Color Temp (CT)	User	Changing CT will reduce screen brightness
Red	50	Factory set value
Green	50	Factory set value
Blue	50	Factory set value
Language	English	There are 12 languages available
OSD H. Pos.	50	Will move location of OSD menus
OSD V. Pos.	50	Will move location of OSD menus
OSD Timer	10	Max value is 60 sec.
Transparency	0	Not useful
Image Auto Adjust	Not Used	Function not enabled in video chip
Color Auto Adjust	Not Used	Function not enabled in video chip
Reset		Will return all settings to factory
Signal Source	HDMI	Can't be changed (HDMI is only interface)
Volume	50	Adjusts analog audio-out level